


**Product:** KPU 60/100

**Product code:** 88700571

Non-perforated cable trays of 60 mm in height

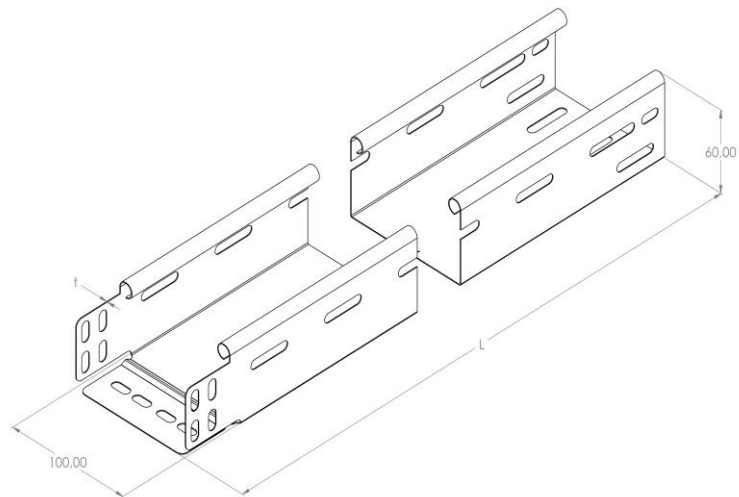

|                                    |  |
|------------------------------------|--|
| <b>Standard:</b>                   | EN 61537:2007 Cable management - Cable tray systems and cable ladder systems |
| <b>Dimensions:</b>                 | Length: 2000 mm  |
|                                    | Width: 100 mm  |
|                                    | Height: 60 mm  |
|                                    | Metal thickness: 0,80 mm   |
| <b>Weight:</b>                     | 3,3 kg   |
| <b>Material:</b>                   | Hot-dip galvanised steel   |
| <b>Contribution to fire:</b>       | Non-flame propagating system   |
| <b>Electrical characteristics:</b> | Electrically conductive system   |
| <b>Electrical continuity:</b>      | Yes  |
| <b>Corrosion resistance:</b>       | Class 6  |
| <b>Perforation:</b>                | Class B  |
| <b>Temperature:</b>                | Min: -20°C; Max: +105°C  |

Permissible load KP 60/100 d=0,8mm (kN/m)

